

DISCONNECT POWER CORD BEFORE SERVICING
IMPORTANT - RECONNECT ALL GROUNDING DEVICES

All parts of this appliance capable of conducting electrical current are grounded. If grounding wires, screws, straps, clips, nuts or washers used to complete a path to ground are removed for service, they must be returned to their original position and properly fastened.

IMPORTANT SAFETY NOTICE

This information is intended for use by individuals possessing adequate backgrounds of electrical, electronic and mechanical experience. Any attempt to repair a major appliance may result in personal injury and property damage. The manufacturer or seller cannot be responsible for the interpretation of this information, nor can it assume any liability in connection with its use.

ELECTRICAL SPECIFICATIONS

Temperature Control (Position 5)	7-(-11)°F
Defrost Control (w/no door openings)	96hrs @ 45 min
Thermistor kilo-ohm resistance	@0°F..... 42.5
	@37°F..... 14
	@77°F..... 5
Overtemperature Thermostat	140-110°F
Defrost Thermistor	50°F
Electrical Rating: 115V AC 60 Hz	11.6 Amp
Maximum Current Leakage	0.75 mA
Maximum Ground Path Resistance	0.14 Ohms

REFRIGERATION SYSTEM

Compressor 21, 25 Models	833 BTU/hr @ 3000 RPM
Minimum Compressor Capacity	22 inches Hg
Minimum Equalized Pressure	
@ 70°F	45 to 48 PSIG
@ 90°F	54 to 60 PSIG





REFRIGERANT CHARGE (R134a)


21, 25 models.....5.50 ounces

NO LOAD PERFORMANCE

Control Position 5/5 and Ambient of 65°F to 90°F	
Fresh Food, °F	34 to 40
Frozen Food, °F	-3 to 3F
Run Time, % @ 65°F	30 to 50
Run Time, % @ 90°F	50 to 80

AIR FLOW

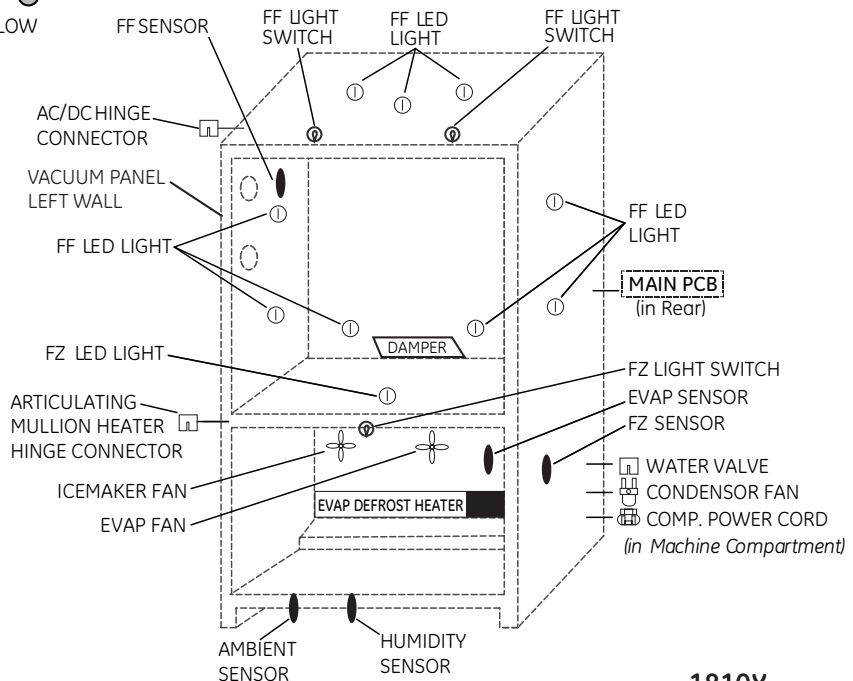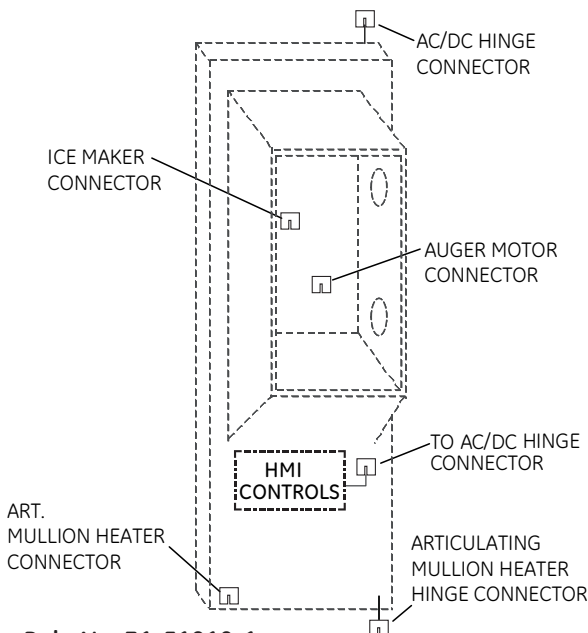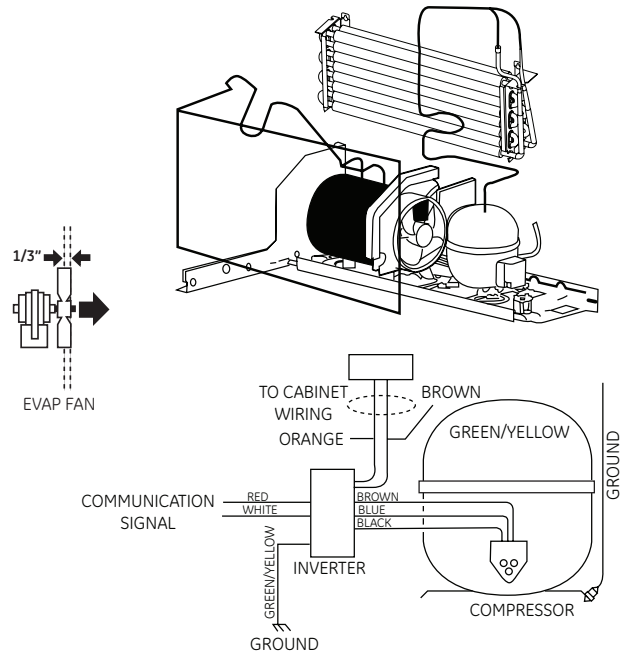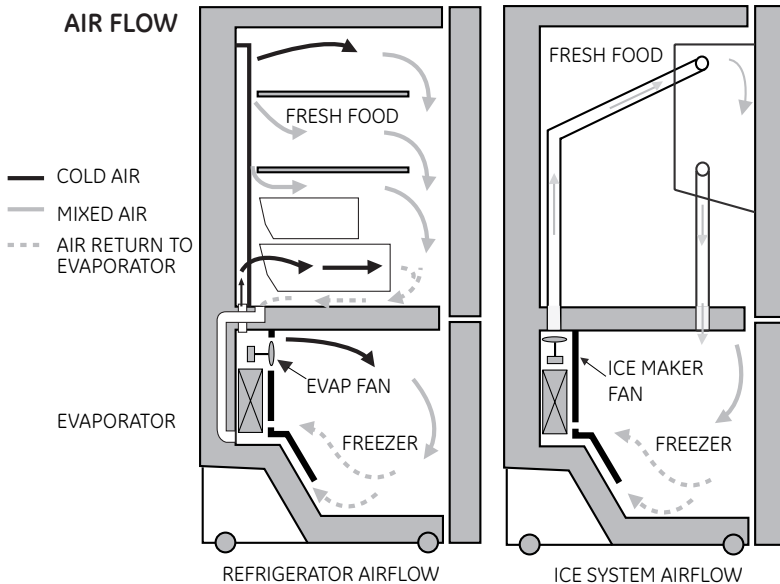

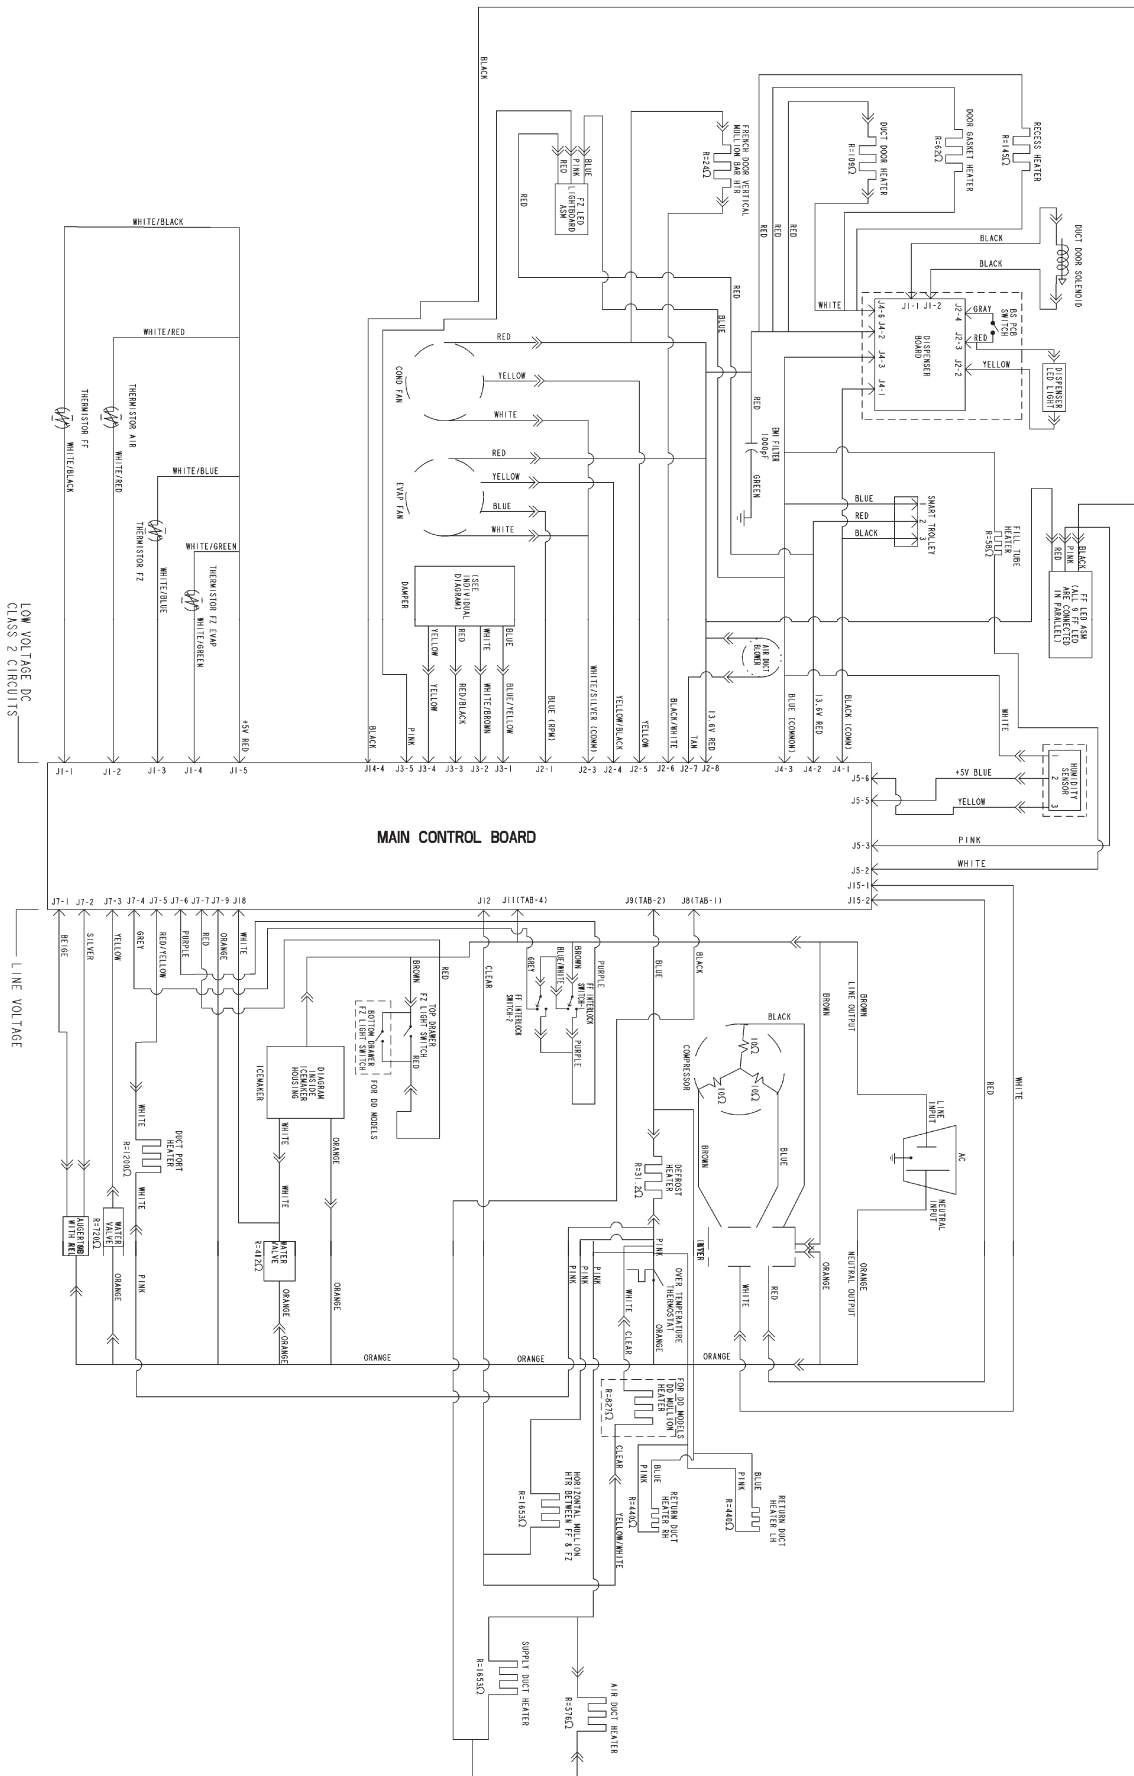

ICE IN DOOR MODELS ONLY